

DEFENDER HD PLUS



DEFENDER is the ideal solution to protect construction sites, special events areas and more generally any locations where temporary demarcation is necessary. The fixing system used between the horizontal and vertical tubes, ensures high standards of strength and durability. Panel length of 3232 mm has been designed to fit more panels in the truck. The system is manufactured according to the CEE 92/57 D.L.494/96 D.L. 528/99 norm.

APPLICATIONS

- > Building worksites
- > Quick storage
- > Work in progress areas
- > Sports and music events
- > Trade fairs

PRODUCT SPECIFICATIONS

Defender HD PLUS working site temporary fence, is made respectively by 40 mm diameter (vertical) & 28 mm diameter (horizontal) pregalvanized tubular frame. To prevent potential injuries, the wire mesh panel infill, is welded in the internal side of the perimeter tubes and counts on 2.9 mm diameter horizontal wires at 248,2 mm centres and 2.2 mm diameter vertical wires at 110 mm centres, galvanized according to the UNI EN 10244-2 norm. The 600x235x130 mm concrete base, is provided with eight holes to suit the vertical profiles size.

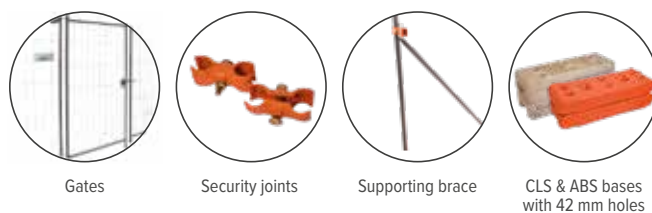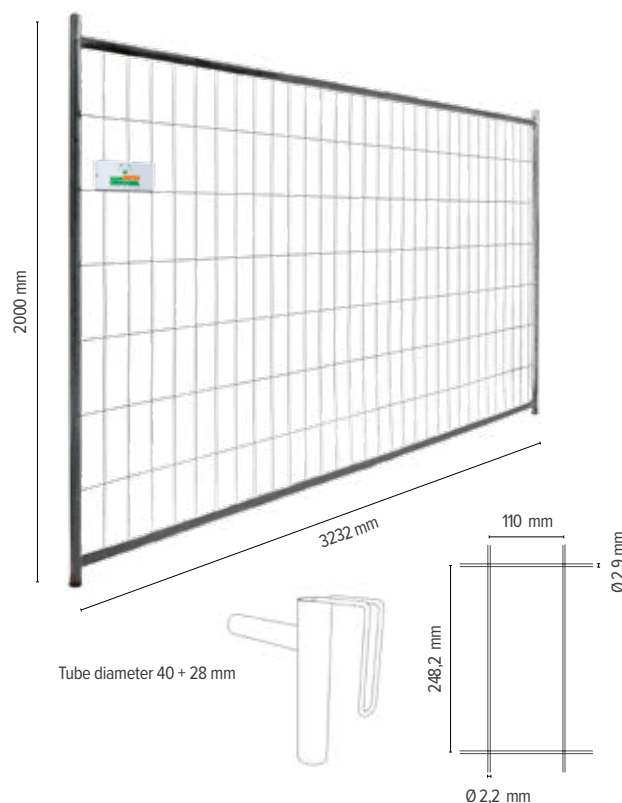

PANEL			MESH		TUBE	BASE
H	L	Weight	H	L	Ø	Weight
mm	mm	Kg/ea	mm	mm	mm	Kg/ea
2000	3232	11	248,2	110	40 + 28	29

